

# JLG® Telehandlers



**JLG®**

*The Power To Do More*

# All the power you'd exp

## POWER, VERSATILITY AND INNOVATION

It's what you expect from a world-leading equipment manufacturer. And what you get with the new family of JLG all-wheel-steer telehandlers. Building on the JLG tradition of engineering expertise and technological innovation, JLG telehandlers are equipped to meet more of your job site

challenges. Higher capacities and extended reach heights give you *the power to do more*. Plus, only JLG offers innovative technologies and products like the totally unique Transformer® machine, the first and only combination telehandler and aerial work platform on the planet.

## MORE capacity

They're big, they're strong, and they're technologically superior. And with capacities ranging from 6,600 to 12,000 pounds, JLG telehandlers have the power to handle your biggest jobs. They are the preferred choice for heavier applications like bridge construction, unloading trucks, shoring, crib work and steel work.

## MORE versatility

Gain a competitive edge and expand the capabilities of your JLG telehandler with a wide range of Quick-Switch attachments. Increase the maximum lift height with a handy six-foot vertical mast. Or place loads in tight spots with a variety of swing carriages. You'll be able to perform dozens of unique job site tasks with speed and efficiency.

## MORE strength

The ability to lift higher and farther is a long-standing JLG tradition. That's why at the heart of every JLG telehandler you'll find an ultra-strong boom capable of providing maximum reach heights from 42 to 55 feet and the highest rated capacities throughout the work envelope.



# ect from JLG...and more.

## Powerful Advantages

- Three distinct steering modes improve maneuverability over varied terrain.
- A side-mounted engine, high boom pivot and a centered cab combine for excellent visibility.
- Ultra-strong boom allows for a wide range of Quick-Switch attachments.
- A spacious operator cab and advanced ergonomics increase comfort while reducing operator fatigue.
- Powershift transmission provides efficient control with 4 speeds forward and 3 speeds reverse.
- Single joystick controls boom lift and crowd.



## MORE control

With cab-mounted controls, a single joystick for more precise boom positioning, and a wrap-around dashboard with easy-to-read gauges, JLG technology provides you with unprecedented control on every job.




## Transformer Machine


Designed to save you time and money on equipment purchases and rentals, the JLG Model TF6-42 Transformer machine is a telehandler and an aerial work platform in one productive package.

As a telehandler it gives you a 6,600-pound capacity, 42-foot lift height and rough terrain mobility. Plus, in just minutes it transforms into a JLG boom lift (meets ANSI A92.5-1992) that is fully driveable from the platform—with a 2,000-pound capacity and room for three workers in the basket.

- ▲ The world's first and only telehandler that complies with OSHA/ANSI regulations for aerial work platforms.



- ▼ Enjoy improved visibility from the spacious cab which features a wrap-around dashboard and a fully-adjustable seating module for added comfort.

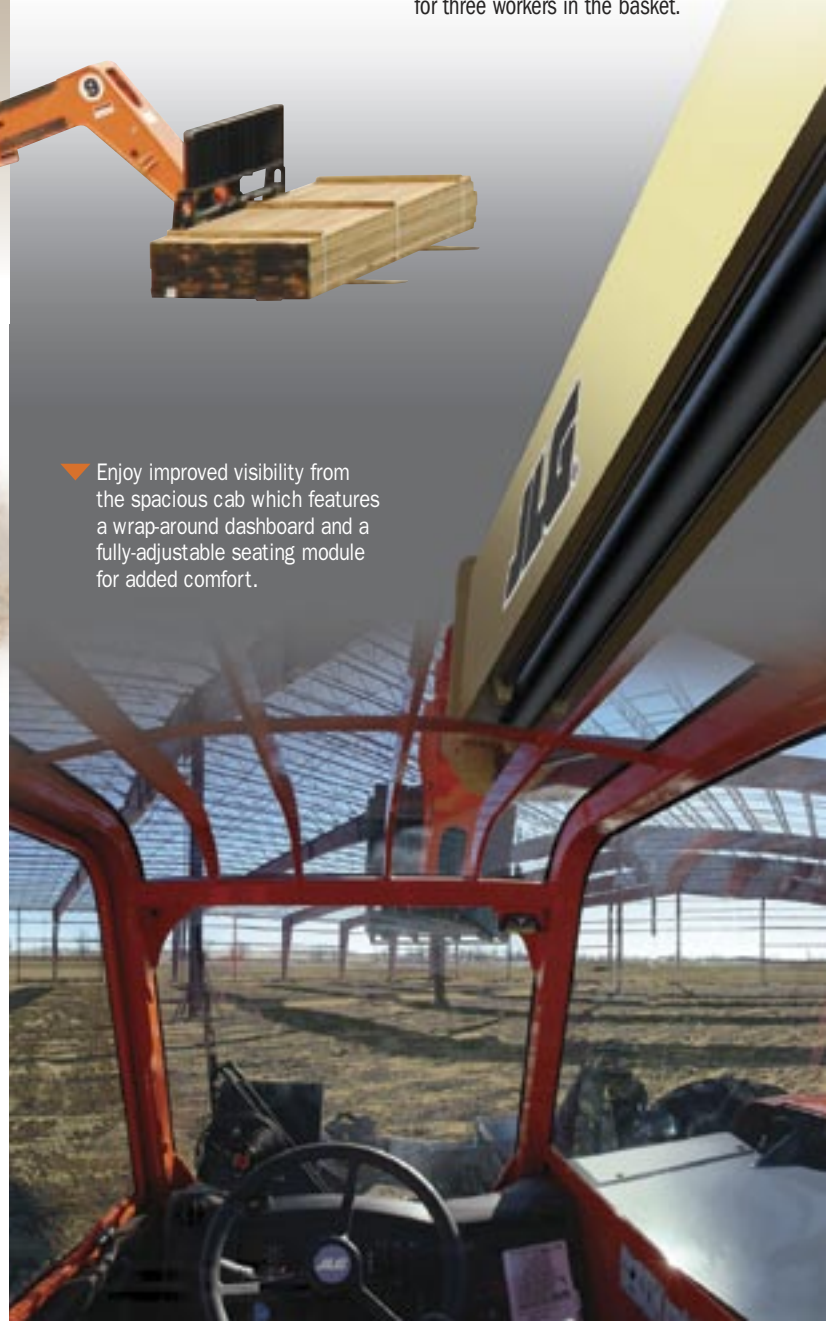

# Quick-Switch attachments help you get the job done

Choose from a wide variety of Quick-Switch attachments and turn your JLG telehandler into a versatile productivity tool capable of handling dozens of job site challenges. The exclusive boom-end design allows a single operator to change from one attachment to another in a matter of seconds.



## Truss Boom

Place roof trusses with precision and lower materials into tight spots.

## Light Material Handling Buckets

Clean up the job site or spread gravel or rip-rap with a range of buckets.

## Personnel Work Platform

Place people and materials where they're needed for optimum productivity.

## Side-Tilt Carriage

Maintain a level load even on hillsides and rough terrain.

## Instant Hook

Deliver loads behind tall obstructions with a hook permanently fixed to the boom end.

## Vertical Mast

Add another six feet to your material handler's lift capability.

## Swing Mast

The swing mast increases lift height by six feet and then swings 50 degrees either right or left.



## Swing Carriage

Extend the boom and swing the carriage right or left by 50 or 90 degrees.

## Drywall Carriage

Avoid drywall damage and speed up unloading and placement through doors and windows.

## Pallet Forks

Choose from a wide range of forks of varying thicknesses, widths and lengths.

## Cubing Forks

Load, unload and place cubes of brick and block with ease.

## Clear Path Material Bucket

The 102-inch (259 cm) wide bucket cleans aisles and access paths with one pass.

## Broom Sweeper

Ideal for brushing debris from job site pathways, brushing away snow or handling light cleanup.

Model	Rated Capacity	Maximum Lift Height	Capacity @ Max. Lift Height	Maximum Reach	Capacity @ Max. Reach	Engine
JLG G6-42A	6,600 lb (2,994 kg)	42 ft (12.8 m)	6,600 lb (2,994 kg)	29 ft (8.84 m)	1,000 lb (454 kg)	John Deere 4045DF - 80 hp (60 kW)
JLG G9-43A	9,000 lb (4,082 kg)	43 ft (13.11 m)	7,000 lb (3,175 kg)	30 ft 6 in. (9.3 m)	1,500 lb (680 kg)	John Deere 4045TF - 99 hp (74 kW)
JLG G10-55A	10,000 lb (4,536 kg)	55 ft (16.76 m)	†5,000 lb (2,268 kg)	42 ft (12.8 m)	†3,000 lb (1,361 kg)	John Deere 4045TF - 125 hp (93 kW)
JLG G12-55A	12,000 lb (5,443 kg)	55 ft (16.76 m)	†5,000 lb (2,268 kg)	42 ft (12.8 m)	†3,000 lb (1,361 kg)	John Deere 4045TF - 140 hp (104 kW)
JLG TF6-42 Transformer	6,600 lb (2,994 kg)	42 ft (12.8 m)	6,600 lb (2,994 kg)	29 ft (8.84 m)	800 lb (363 kg)	John Deere 4045DF - 80 hp (60 kW)

PLEASE NOTE: These limited specifications are for reference only. Please refer to appropriate specification sheet for complete information.

† Stabilizers are required to achieve stated capacity.

## Powerful service and support

JLG is committed to providing the most powerful service, parts, support and distribution in the world. You'll have everything you need to keep your machine on the job, whenever and wherever you need it. Plus we have the financial power to give you more ways to acquire equipment through Access Financial Solutions, Inc.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification. These machines meet or exceed ASME B56.6-2002 as originally manufactured for intended applications.

**JLG Industries, Inc.**  
 1 JLG Drive, McConnellsburg, PA 17233-9533  
 Telephone 717-485-5161  
 Toll-free in US 877-JLG-LIFT  
 Fax 717-485-6417  
[www.jlg.com](http://www.jlg.com)

Form No.: B-JLGT-0704-15M  
 Part No.: 3132214  
 R060501  
 Printed in USA

